

**SAN DIEGUITO WETLANDS RESTORATION PROJECT**

**18 OCTOBER 2010 BEACH PROFILES  
CITY OF DEL MAR, CALIFORNIA**

Data Report



Prepared by

Coastal Environments  
2166 Avenida de la Playa, Suite E  
La Jolla, CA 92037

Prepared for

Southern California Edison Company  
2244 Walnut Grove Avenue  
Rosemead, CA 91770

31 December 2010  
CE Reference No. 10-37

## TABLE OF CONTENTS

1.0	INTRODUCTION .....	1
2.0	PERMIT REQUIREMENTS .....	1
3.0	METHODS AND PROCEDURES .....	1
4.0	BEACH PROFILE SURVEY RESULTS .....	3
5.0	REFERENCES .....	3

## LIST OF APPENDICES

Appendix A.	October 18, 2010 Beach Profiles .....	A-1
Appendix B.	October 18, 2010 Beach Widths and Volumes .....	B-1

## LIST OF TABLES

Table 1.	Beach profile onshore survey marker locations .....	2
Table 2.	Beach profile benchmark distance to Del Mar SPA line .....	5
Table B-1.	Beach widths (ft) from 18 October 2010 beach profile survey referenced to benchmarks .....	B-2
Table B-2.	Beach widths (ft) from 18 October 2010 beach profile survey adjusted to City of Del Mar SPA .....	B-2

## LIST OF FIGURES

Figure 1.	Schematic illustration of survey method .....	4
Figure 2.	Beach profiles surveyed on 18 October 2010 .....	6
Figure A-1.	Beach profile for SIO1 taken 18 October 2010 .....	A-2
Figure A-2.	Beach profile for SIO2 taken 18 October 2010 .....	A-3
Figure A-3.	Beach profile for SIO5B taken 18 October 2010 .....	A-4
Figure A-4.	Beach profile for SIO6 taken 18 October 2010 .....	A-5
Figure A-5.	Beach profile for SIOA taken 18 October 2010 .....	A-6
Figure A-6.	Beach profile for SIOB taken 18 October 2010 .....	A-7
Figure A-7.	Beach profile for SIOC taken 18 October 2010 .....	A-8

## **SAN DIEGUITO WETLANDS RESTORATION PROJECT 18 OCTOBER 2010 BEACH PROFILES**

### **Data Report**

#### **1.0 INTRODUCTION**

This report describes the beach profiles surveyed along the Del Mar and Solana Beach coastline near the San Dieguito inlet on 18 October 2010. The survey program is designed to comply with permit conditions set forth in the Coastal Development Permit (No. 06-04-088) issued by the California Coastal Commission (CCC) for the San Dieguito Wetlands Restoration Project.

#### **2.0 PERMIT REQUIREMENTS**

The permit requires offshore beach profiles to be performed at seven (7) profile locations near the inlet to the San Dieguito Wetlands. Four of the profiles are to be at historic profile locations, including DM-0590 (SIO1), DM-0580 (SIO2), SIO5B, and SIO6. Three new profile locations are south of SIO1: 500 feet (SIOA), 1,000 feet (SIOB), and 1,500 feet (SIOC) south of SIO1. Table 1 outlines the locations of the beach profiles.

Full profile (offshore/onshore) surveys are to be performed in the spring (April) and fall (October) for the seven profiles, and wading/onshore profiles will be performed quarterly. All of the surveys are to be referenced to the City of Del Mar's Shore Protection Area (SPA) line, or to a fixed and identified feature for the one site north of the SPA line (SIO6). The full profile surveys are to go to the depth of closure, where there are no substantial changes in bottom profile due to seasonal variations in wave conditions. The depth of closure has ranged from 35 ft to 50 ft in San Diego County (SANDAG, 2009).

This report provides data on the fall 2010 profiles required by the permit.

#### **3.0 METHODS AND PROCEDURES**

The beach profiles were performed from the benchmarks to wading depth by total station and prism. The offshore portion of the beach profiles was surveyed by boat equipped with echosounder and navigation system. Data were acquired along each transect from the survey marker to an offshore limit of approximately -50 feet, NGVD. Each survey marker (benchmark) was located at the back beach at a fixed point, primarily along a protective seawall. Data were collected at least to the depth of closure indicated by prior survey data (SANDAG, 2009).

The beach and surf zone were surveyed using an electronic total station and a survey rod. The total station was used to determine the position and elevation of the beach at each location occupied by the rod. A Sokkia Set-5A total station and SDR-33 electronic field data logger were utilized to collect the nearshore portion of the profile, providing an accuracy of 2-4 cm both

**Table 1. Beach profile onshore survey marker locations.**

<b>Benchmark</b>	<b>California State Plane Coordinates, Zone 6 (ft), NAD83</b>		<b>Elevation, NGVD29 (ft)</b>
	<b>Northing</b>	<b>Easting</b>	
SIO1	1935951.7	6248823.5	13.5
SIO2	1934061.9	6249131.2	13.5
SIO5B	1936545.5	6248645.2	14.9
SIO6	1938477.3	6248035.2	18.0
SIOA	1935521.4	6248888.9	14.8
SIOB	1935008.3	6248975.3	14.7
SIOC	1934488.5	6249054.7	15.3

horizontally and vertically. The total station method reflects an infrared beam sent from the device to a prism atop a fixed-length pole, where the instrument measures the slant distance and horizontal and vertical angles to the target (Figure 1). An electronic field data logger is used to store the data, which can then be set to known positions using permanent local benchmarks. Each transect was surveyed from the back beach seaward through the surf zone until the rod no longer protruded above the water surface. This location, typically at an elevation of 10 to 12 feet, NGVD, provided substantial overlap with the landward portion of the offshore survey.

The offshore portion of the beach profile was acquired with a digital acoustic echo sounder operated from a 27-ft shallow-draft survey vessel. A DGPS receiver was used to determine the position of each sounding. To improve the accuracy of each position, differential corrections transmitted in real time from U.S. Coast Guard beacons were utilized. All systems were interfaced to a laptop computer using the Hypack survey package.

At each transect, the boat traveled from the offshore limit to the surf zone guided by DGPS navigation system. Soundings were acquired on a near-continuous basis (approximately four to five per second). Vessel positions were recorded at 1-second intervals and merged with the soundings using Hypack bathymetric survey software. The calibration of the echo sounder was checked at the beginning and end of each survey session using a standard “bar check” procedure.


The beach width was calculated from the Del Mar SPA line to 0 ft NGVD except for SIO6, which was calculated from the benchmark. The distance of the profile benchmarks to the SPA line is shown in Table 2. Volume density calculations were calculated for +3.0 ft, 0 ft, and -2.56 ft NGVD for each of the profiles, beginning at the benchmark elevation.

#### **4.0 BEACH PROFILE SURVEY RESULTS**

The 2010 beach profile surveys were performed on 18 October 2010 along the four historic and three newly established profiles (Figure 2). Each transect was surveyed to an elevation of approximately -50 feet, NGVD, to ensure that each offshore limit was located seaward of the depth of closure. The cross-sections of the survey profiles are presented in Appendix A. The beach width for each of the profiles is presented in Appendix B.

#### **5.0 REFERENCES**


SANDAG, 2009. Regional Beach Monitoring Program – Annual Report, June 2010, Chatsworth, CA. 111 pp. + app.

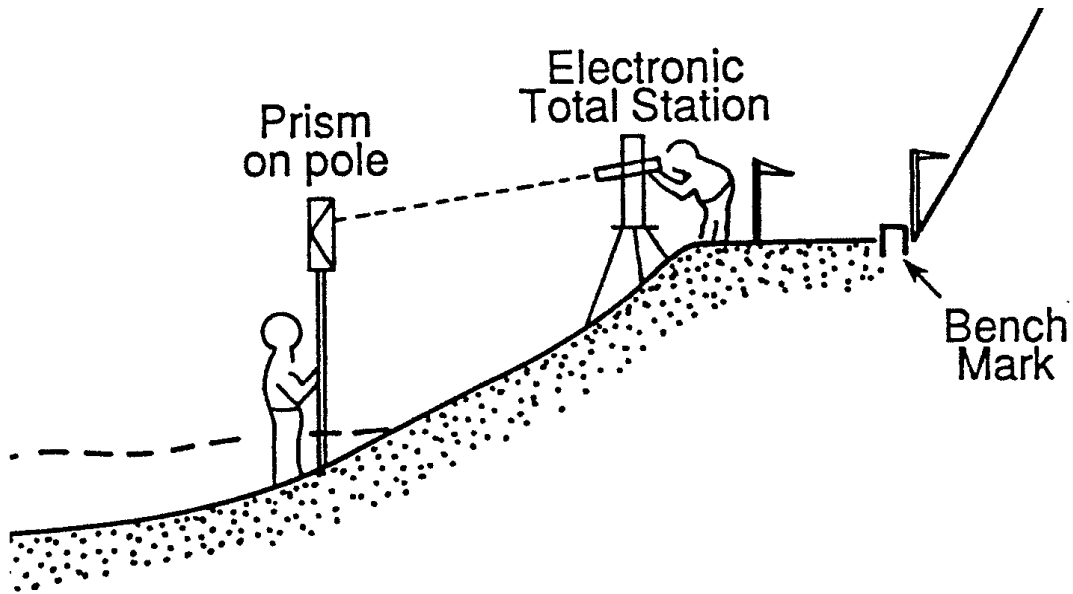

**Figure 1. Schematic illustration of the survey method.**


**Table 2. Beach width adjustment to City of Del Mar Shoreline Protection Area Line (SPA).**

<b>Benchmark</b>	<b>Adjustment(ft)</b>
SIO1	+1.4
SIO2	+1.0
SIO5	+12.2
SIO5B	+32.2
SIO6	0
SIOA	+1.5
SIOB	-4.2
SIOC	+9.3

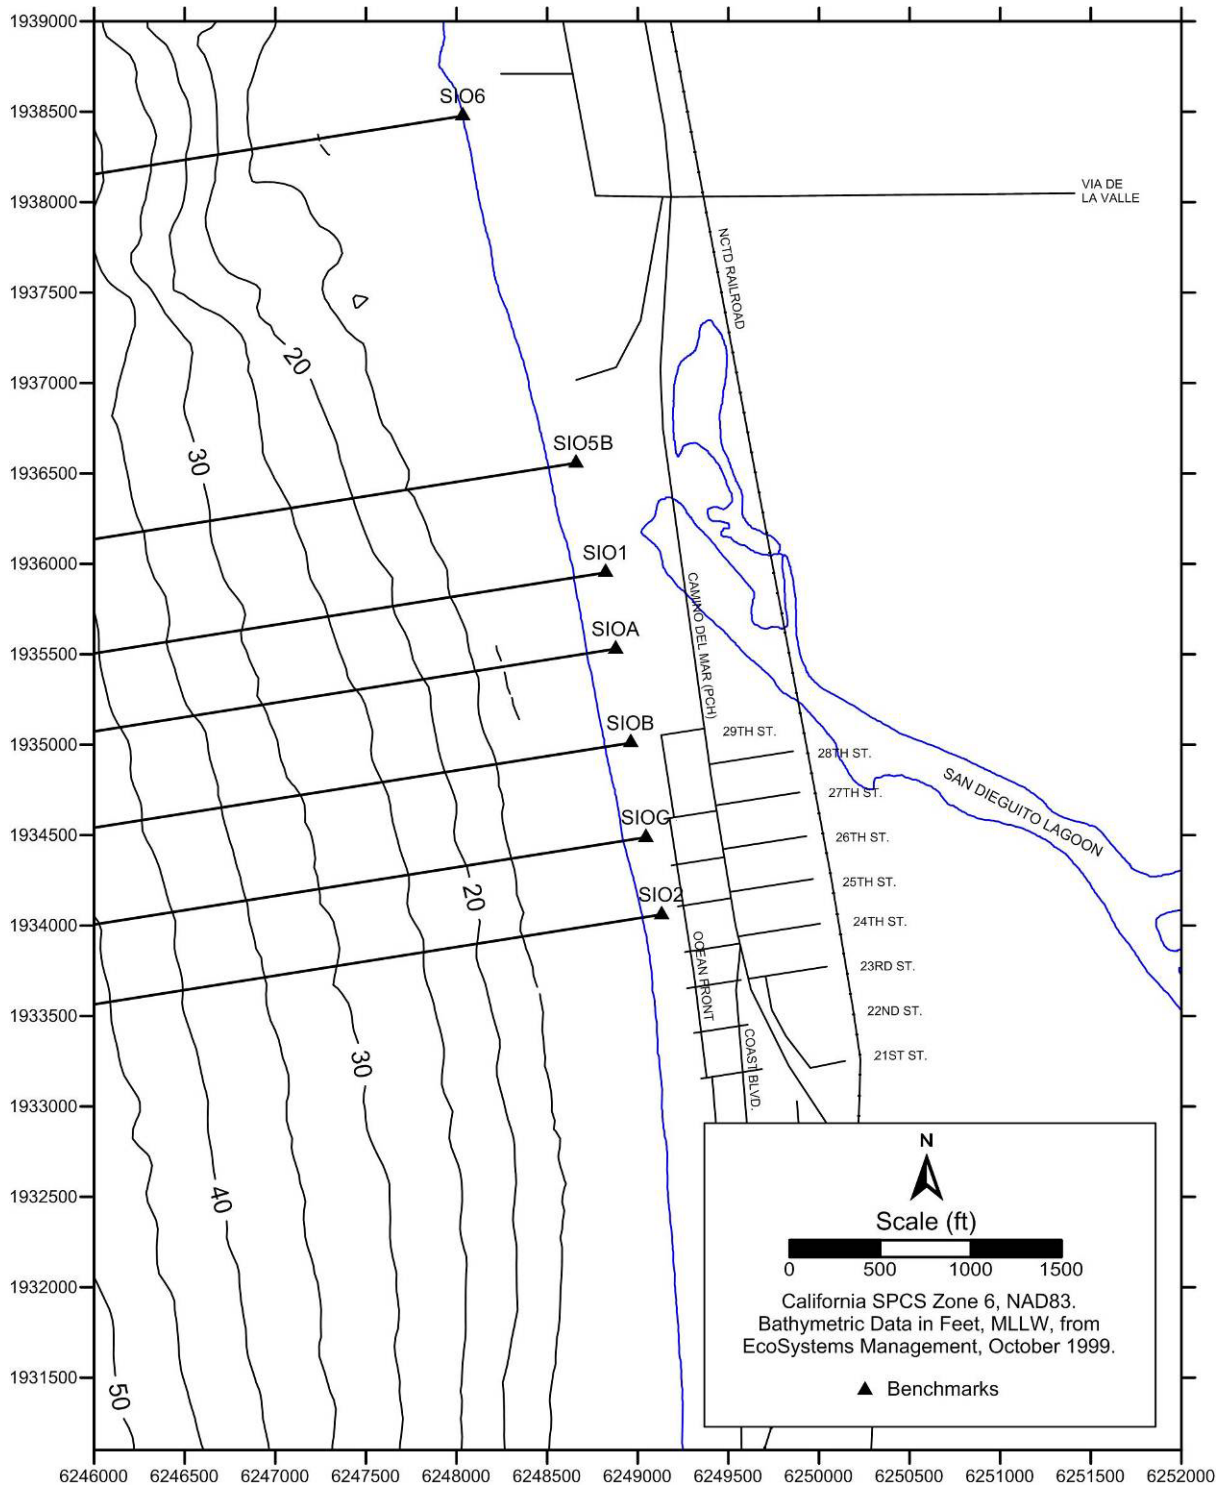


**Figure 2. Beach profiles surveyed on 18 October 2010.**


**APPENDIX A**  
**OCTOBER 18, 2010 BEACH PROFILES**

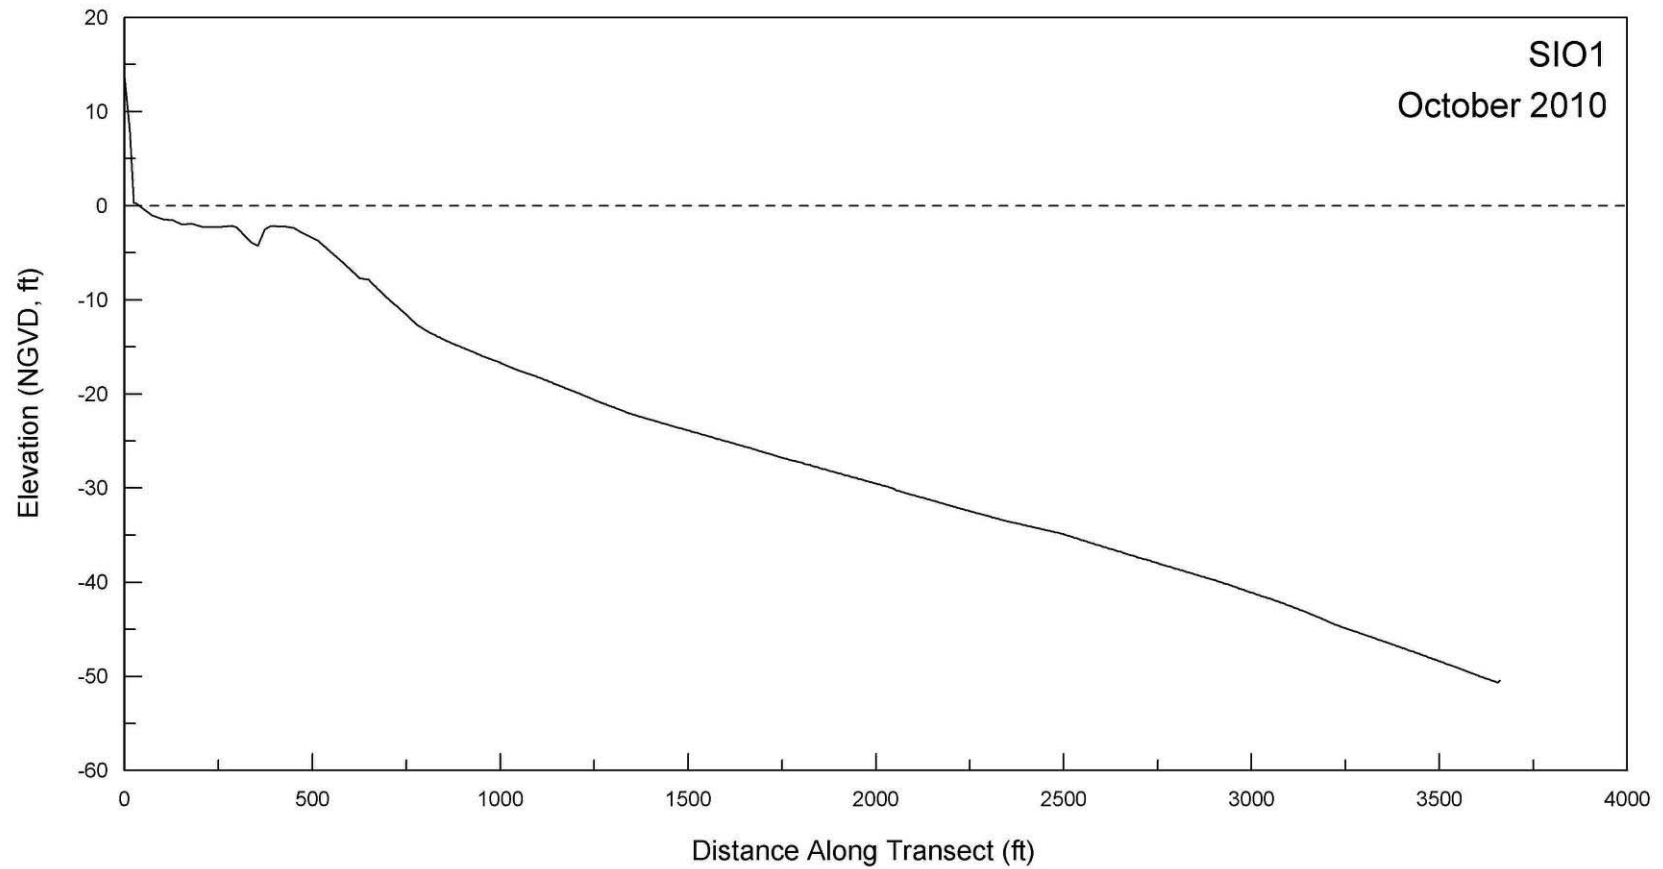


**Figure A-1. Beach profile for SIO1 taken 18 October 2010.**

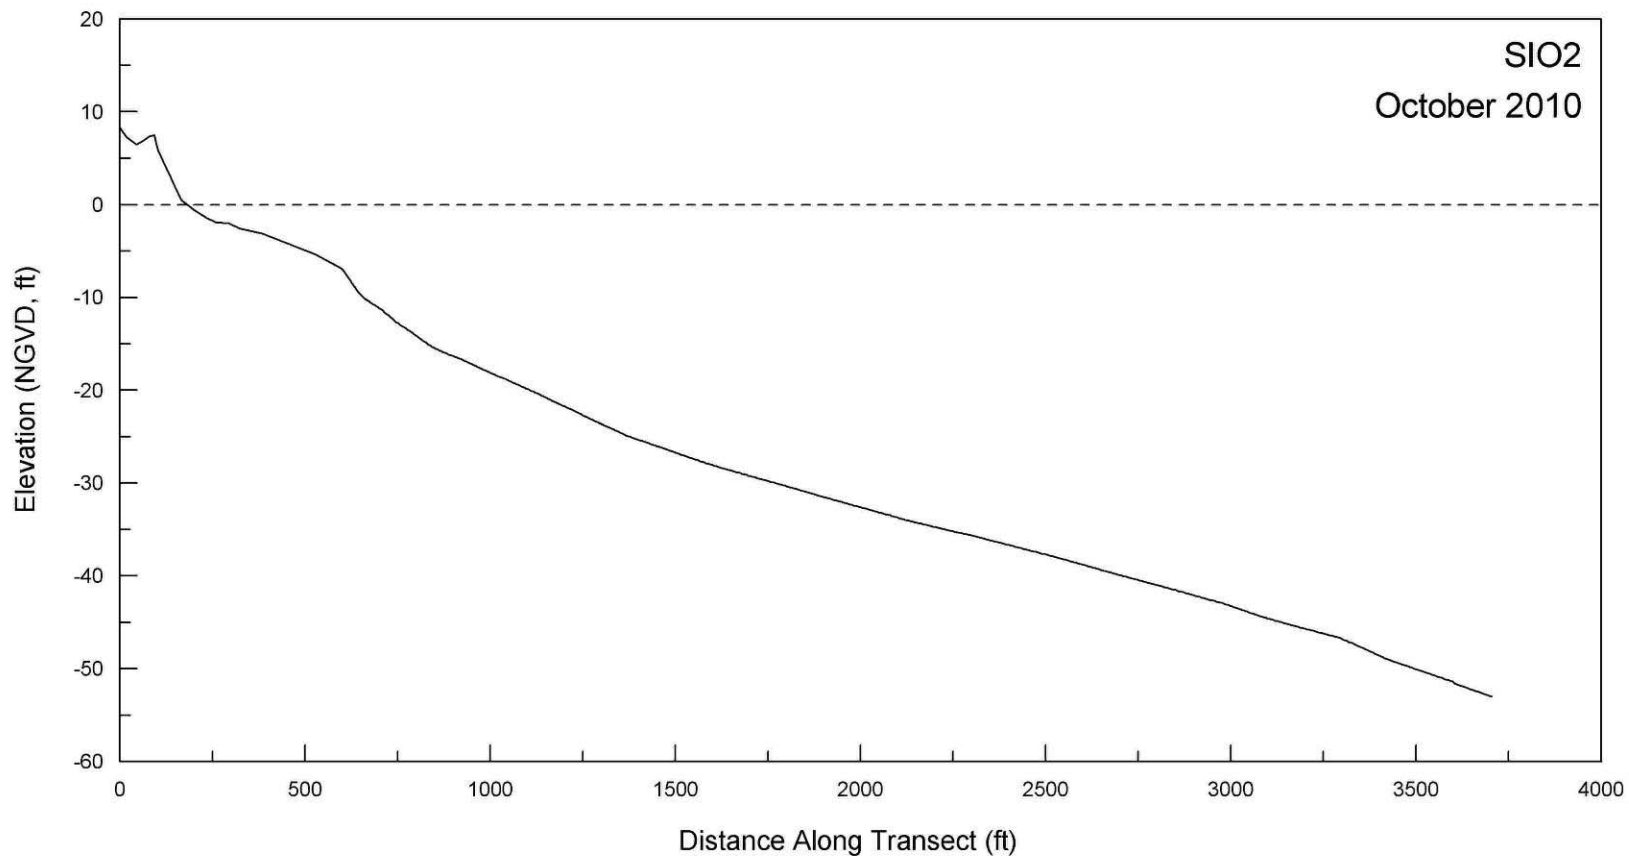


**Figure A-2. Beach profile for SIO2 taken 18 October 2010.**

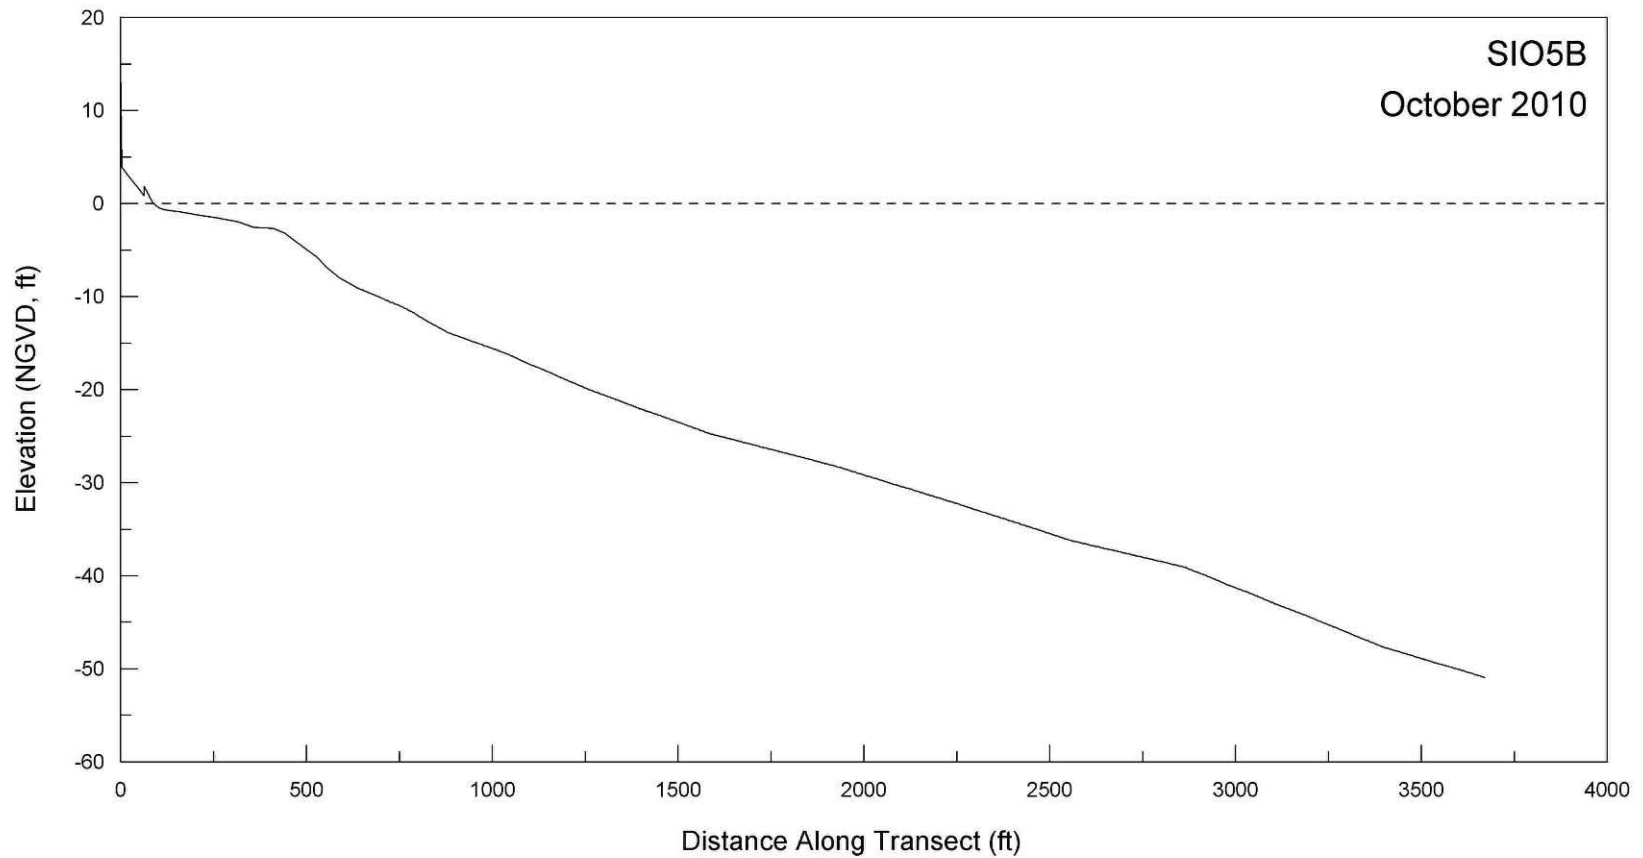


**Figure A-3. Beach profile for SIO5B taken 18 October 2010.**

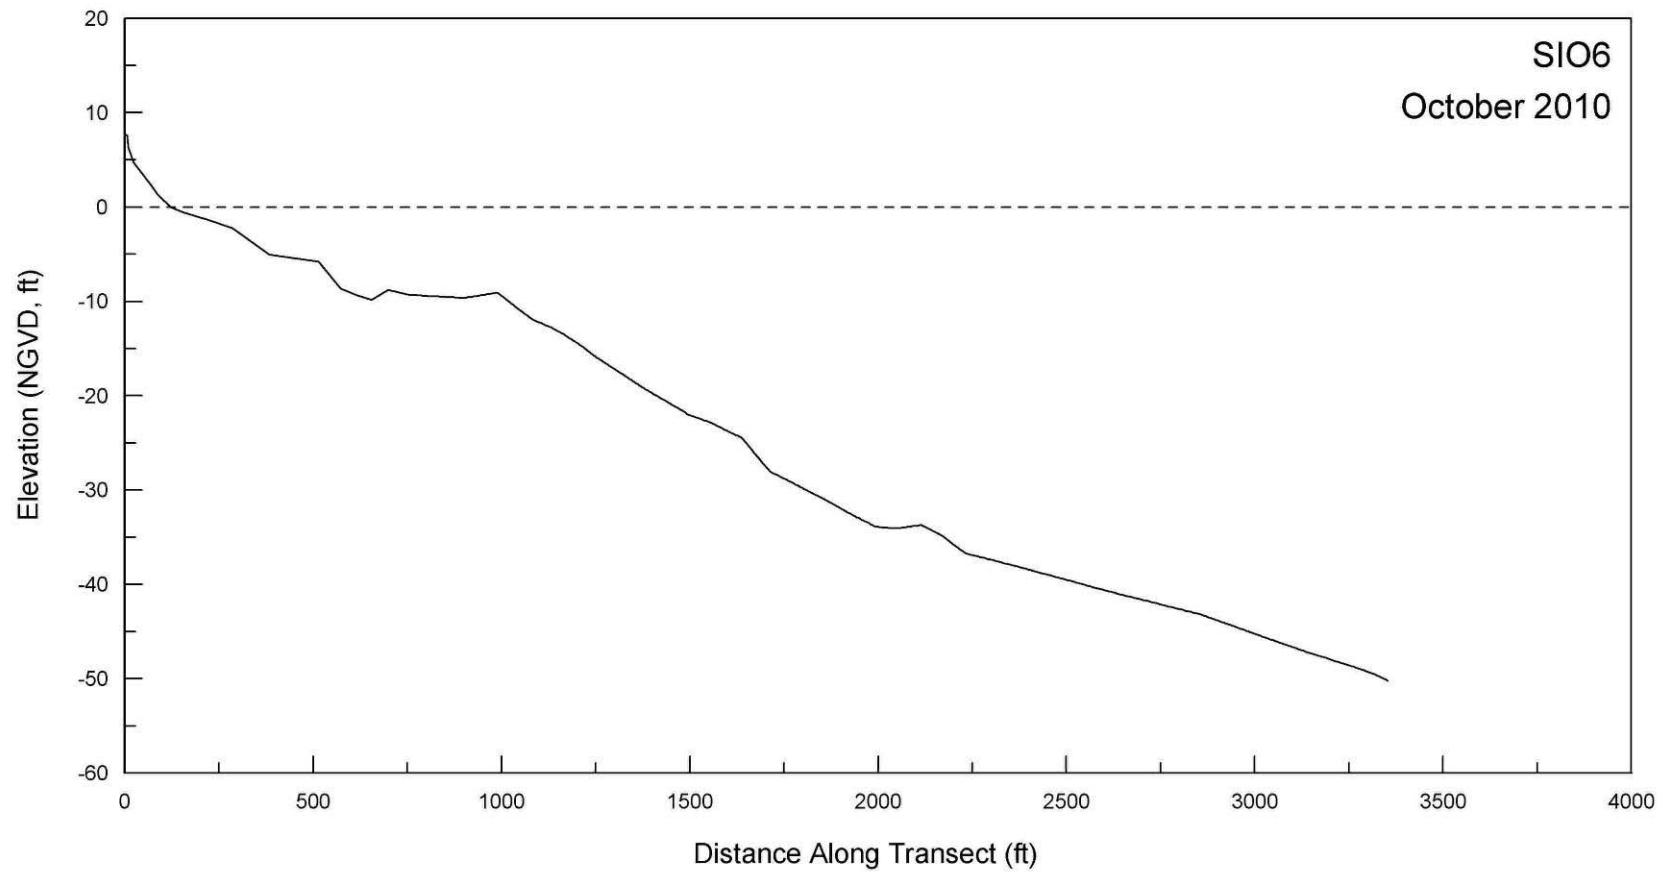


**Figure A-4. Beach profile for SIO6 taken 18 October 2010.**

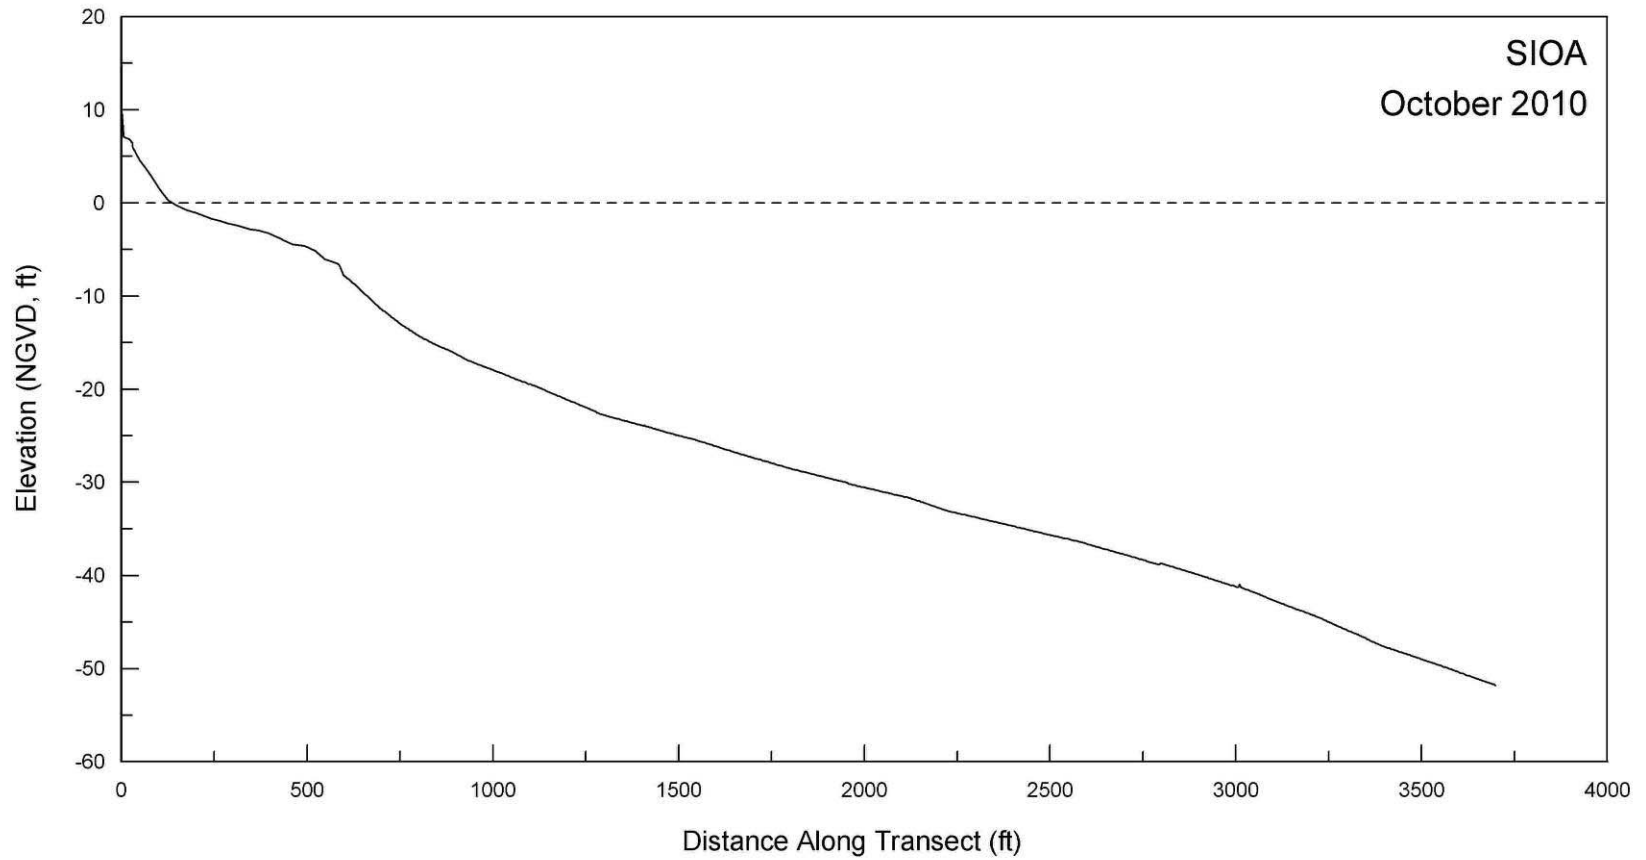

**Figure A-5. Beach profile for SIOA taken 18 October 2010.**

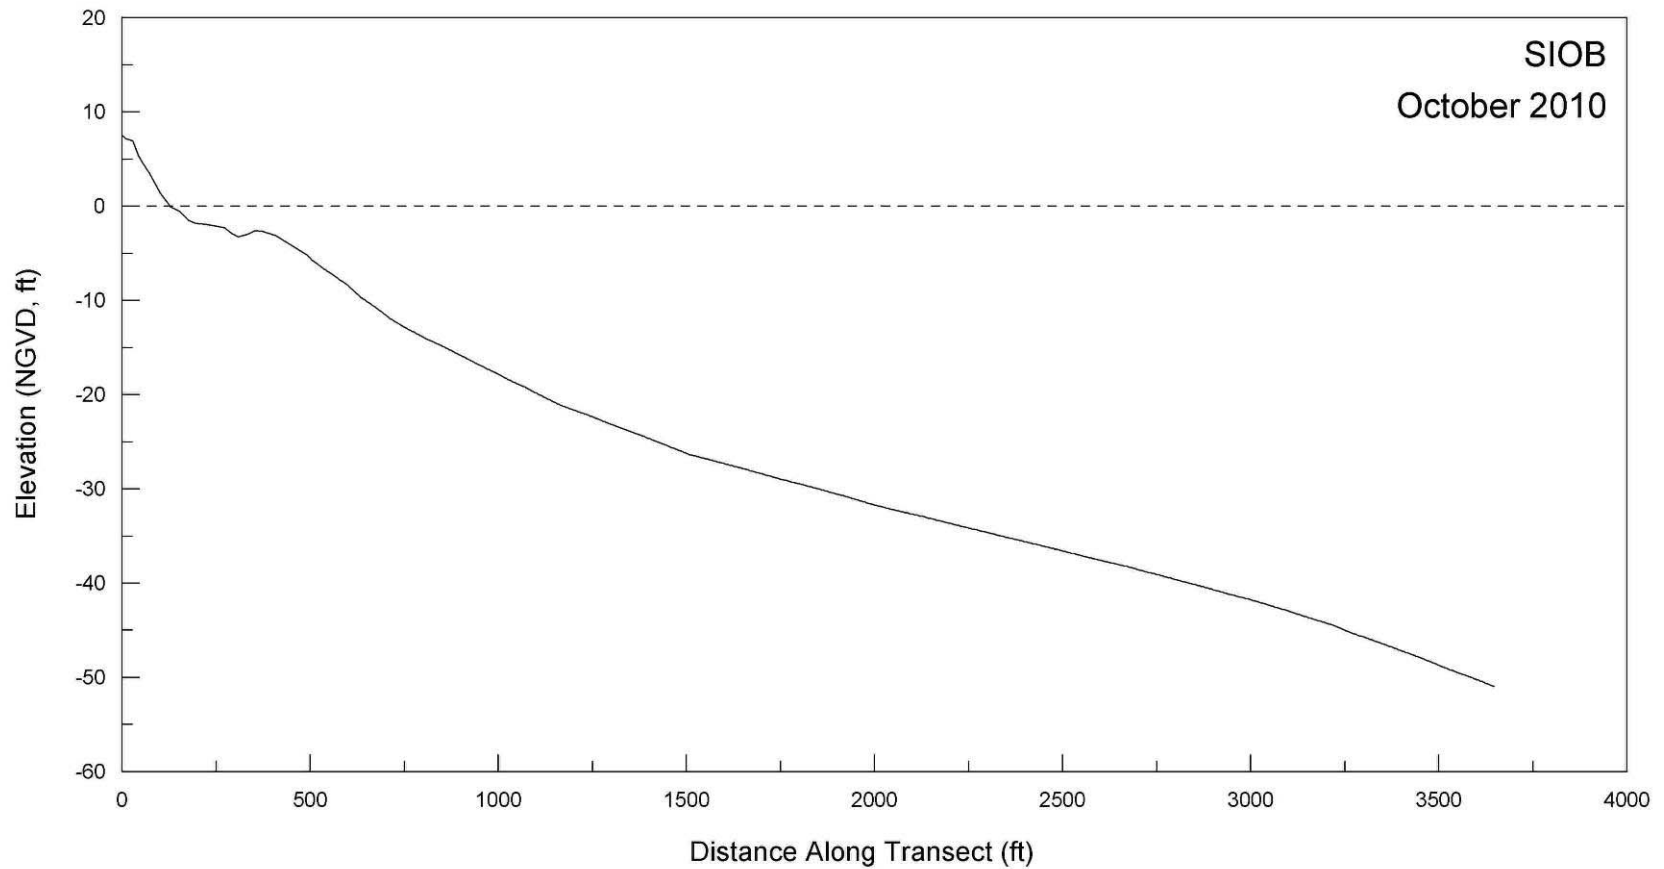

**Figure A-6. Beach profile for SIOB taken 18 October 2010.**

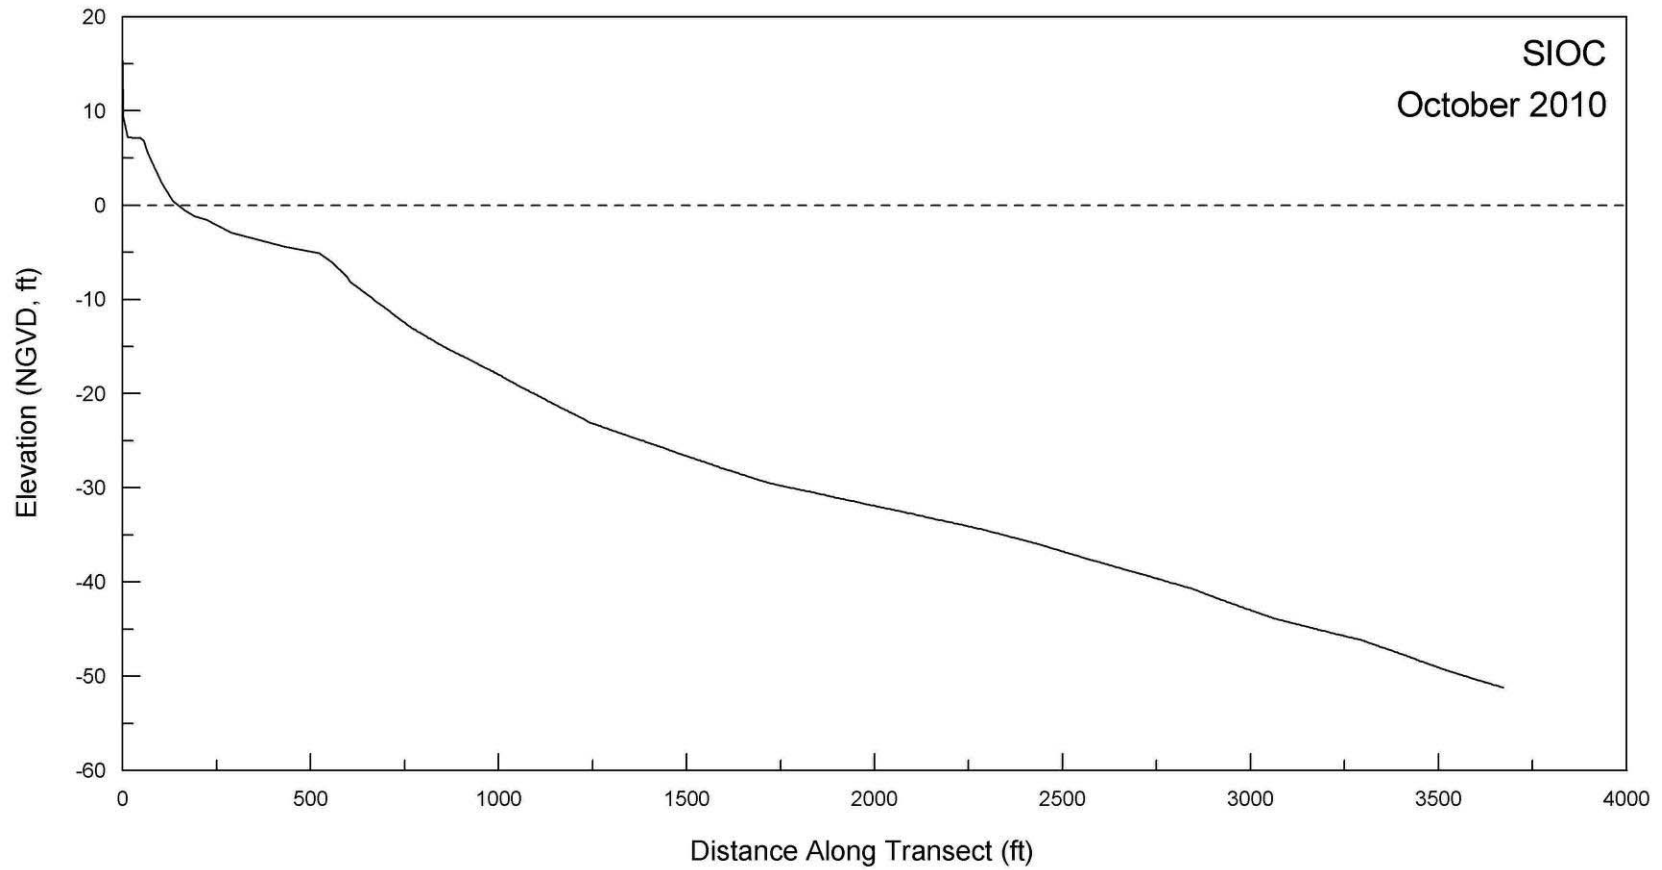

**Figure A-7. Beach profile for SIOC taken 18 October 2010.**

**APPENDIX B**

**OCTOBER 18, 2010**

**BEACH WIDTHS AND VOLUMES**

**Table B-1. Beach widths (ft) from 18 October 2010 beach profile survey referenced to benchmarks.**

<b>Date</b>	<b>SIO1</b>	<b>SIO2</b>	<b>SIO5B</b>	<b>SIO6</b>	<b>SIOA</b>	<b>SIOB</b>	<b>SIOC</b>
<b>18 Oct 2010</b>	39.4	181.7	88.6	121.5	137.5	127.4	148.1

**Table B-2. Beach widths (ft) from 18 October 2010 beach profile survey adjusted to City of Del Mar SPA.**

<b>Date</b>	<b>SIO1</b>	<b>SIO2</b>	<b>SIO5</b>	<b>SIO6</b>	<b>SIOA</b>	<b>SIOB</b>	<b>SIOC</b>
<b>18 Oct 2010</b>	40.8	182.7	120.8	121.5	139.0	123.2	157.4

Note CCC conditions:

- (1) The beach width at DM-0590 (SIO1) is at or less than 32.4 feet (the lowest historically observed minimum);
- (2) The beach width at DM-0590 (SIO1) is at or less than 90 feet and there is more than a 180-foot difference in beach widths measured at DM-0590 and DM-0580 (SIO1 and SIO2); or
- (3) The beach width at SD-0595 (SIO5) is at or less than 74 feet (the lowest historically observed minimum).